

DURASEAL ZERO™

Excellent Blushing Resistance

Clear films of Duraseal Zero™ display excellent resistance towards water blushing in comparison to leading commercial acrylic formulas. Not only does the clear film of Duraseal Zero show a minimal amount of blushing, but they also completely recover to clear films when cured, usually within 24 hours

Very Low Permeability

Testing performed to ASTM D-5084 shows significant reduction of permeability to porous substrates.

Chemical Resistance

Duraseal Zero™ is effective even when soaked in 50% Hydrochloric Acid making a physical barrier against highly corrosive chemicals.

EASY CLEAN UP

Clean equipment with fresh water.



DURASEAL ZERO™

Duraseal ZERO™ provides excellent water repellency and is suitable for both dry and slightly damp surfaces. It ensures a long lasting barrier and is impermeable to water, vapors, and most chemicals. Duraseal ZERO™ shows superior resistance to water, efflorescence, alkalis, acids, ultra-violet light and staining. It also minimizes iron staining by helping prevent reinforcing steel from corroding and deteriorating due to water intrusion. It greatly improves the resistance of concrete to Freeze-Thaw damage and salt penetration.

SIMPLE APPLICATION

Apply one coat of DuraSeal Zero™. A second coat can be applied if surface is very porous. Make sure first coat is completely dry before applying second coat; usually one to three hours.



DURASEAL ZERO™

Is Excellent for use on

- ◆ Concrete Walls & Floors
- ◆ Precast Concrete
- ◆ Hospitals & Schools
- ◆ Pool Decks
- ◆ Residential Applications
- ◆ Walkways & Sidewalks
- ◆ Commercial & Industrial

Anywhere a Quality ZERO VOC

clear sealer is desired!

Important Note:

As with any product, always test a small area to verify satisfaction of the sealed appearance.

Manufactured by



1019 SE Holbrook Court
Port Saint Lucie, FL 34952

Phone: 772.335.8225


sales@enviroseal.com

WWW.ENVIROSEAL.COM

DURASEAL ZERO™

DuraSeal Zero™ is a Zero VOC clear acrylic waterborne finish designed to protect and beautify concrete and masonry surfaces. **DuraSeal Zero™** protects against organic stains including cooking oil, grease and beverages. It may be used indoors or outdoors and is easy to apply .

Duraseal ZERO™ is a non-toxic sealer which can be applied to new or old concrete. It contains no solvents and its V.O.C. is **zero** as determined by independent laboratory testing done in accordance with EPA Method 24.

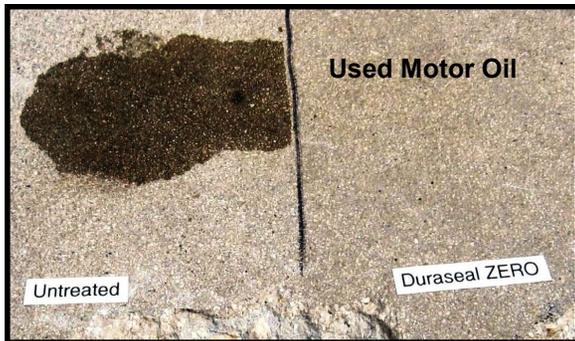

Water Test on Sealed Concrete

DURASEAL ZERO™

COVERAGE RATES

Typical coverage rates are 100 to 400 square feet per gallon dependent on surface porosity

PACKAGING

5-Gallon pails
55-Gallon drums
275-Gallon Totes.

Little to No Odor

Duraseal Zero™ has a Very Low odor threshold unlike most other formulations that makes it ideal for applications in public or environmentally sensitive areas. Its ease of use is preferred by professional applicators.

Manufactured by

Enviroseal

**1019 SE Holbrook Court
Port Saint Lucie, FL 34952**

**Phone: 772.335.8225
Fax: 772.335.3991**

sales@enviroseal.com

WWW.ENVIROSEAL.COM

Enviroseal

Duraseal ZERO™ Zero VOC Concrete and Masonry Sealer



Duraseal ZERO™ is a premium proprietary waterborne sealer that is a Nano formulation. It seals porous masonry and other surfaces with a clear acrylic film. **Duraseal ZERO™** resists staining and retains its semi-gloss finish longer than standard concrete sealers.

All of these benefits are available in an easy to use ZERO VOC formulation.

Duraseal ZERO™ is the clear choice for industry professionals and perfect for LEED and Green Building Projects!